


# HORON 84 XT



Low-profile

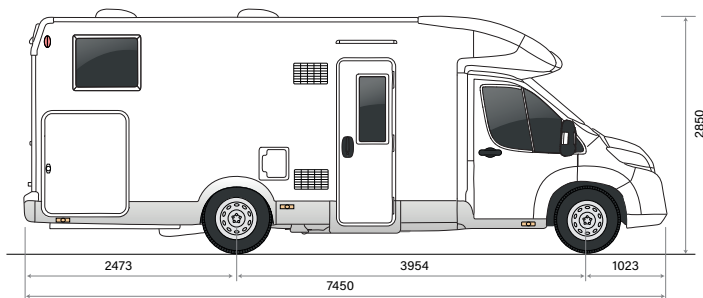

2350 7450



## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi EcoBlue 165 CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500(OPT) / 4100
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2950
PAY LOAD (KG)	550 / 1150
WHEELBASE (MM)	3954
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" lega
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S + Intelligent Speed Assist
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
FOG LIGHTS	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE	S
REAR BED (CM)	210x80 - 210x80 - 215x130
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216x65
ELEVATING BED (CM)	203x135(114)
LOCKER (USEFUL OPENING, CM)	120x90 - 120x90
MAX. INTERNAL GARAGE HEIGHT (CM)	120
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

## INSTALLATIONS

BURNERS	2
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100) / 90
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	137
STANDARD HEATING SYSTEM	Truma Combi 4 Gas
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	-
INTEGRATED ENTRY STEP	S (coibentato)
HEATED GARAGE LOCKER	S

## SKYLIGHT

PANORAMIC ROOF (MM)	S (1000x80)
REAR SKYLIGHT (MM)	S (400x400)
CENTRAL SKYLIGHT (MM)	S (400x400)
SKYLIGHT SHOWER (MM)	28x28
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

## EQUIPMENTS

PLEATED CAB BLIND	S
REAR-VIEW CAMERA	S
SOLAR PANEL	S
AWINING	S
INTERNAL LED LIGHTENING	S

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S (XL)
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS	S
FLYSCREEN FOR ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood



www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.